

06. qBittorrent

In this section we will setup our qBittorrent downloading client.


1. First get your temporary password that is provided to login which you can find in the logs. Use the command

```
sudo docker logs qbittorrent
```

Example output

[migrations] started

[migrations] no migrations found

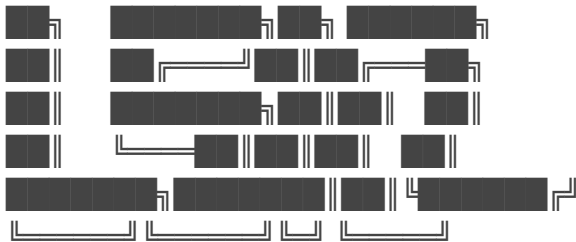

Brought to you by linuxserver.io

To support LSIO projects visit:
<https://www.linuxserver.io/donate/>

GID/UID

User UID: 1000
User GID: 1000

Linuxserver.io version: 5.2.1_v2.0.13-ls460
Build-date: 2026-06-08T23:02:32+00:00

[custom-init] No custom files found, skipping...
WebUI will be started shortly after internal preparations. Please wait...

***** Information *****

To control qBittorrent, access the WebUI at: <http://localhost:8080>

The WebUI administrator username is: admin

The WebUI administrator password was not set. A temporary password is provided for this session: yfUHUIHFX

You should set your own password in program preferences.

Connection to localhost (::1) 8080 port [tcp/http-alt] succeeded!

2. Then go to IP address:8080 and login with "admin" and your temporary password
3. Once logged in you can change your password and username by going to Settings > WebUI
- 4.

5. What's next is setting up the directory scheme for the torrent files
6. Go to Settings > Downloads
7. Then Look for

Default save path: /data/torrents/completed

Keep incomplete torrents in: /data/torrents/incomplete

Copy torrent files to: /data/torrents/torrents

8. Congratz now your qBittorrent client is all set

Revision #1

Created 2026-07-05 21:56:17 UTC by dpasn

Updated 2026-07-05 21:56:17 UTC by dpasn